


**POWER DISTRIBUTION UNIT**

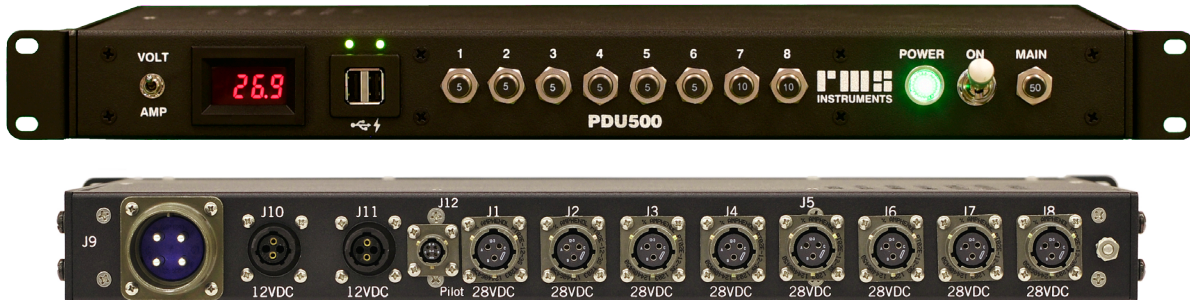

Reliable power distribution for equipment racks, ensuring that your installation performs up to the standards demanded by your unique application requirements.

**SPECIFICATIONS**

Outputs:	<p>6 x 28VDC at 5A – individual circuit breaker protection for each load J1–J6: PT02E12-3S 3-pin connectors</p> <p>2 x 28VDC at 10A – individual circuit breaker protection for each load J7–J8: PT02E12-3S 3-pin connectors</p> <p>2 x 12VDC at 6A, regulated outputs – internal resettable thermal fuses J10–J11: 206430-1 4-pin connectors</p> <p>2 x 5VDC at 1.5A – USB-A connectors, current limited, short-circuit protected</p>
Input:	<p>50A protected – practical load is 45A @ 28VDC input J9: 97-3102A-22-22P Reversed-polarity protection</p>
Pilot Control/Shut Off:	<p>Pilot control shut off connector – pins A and D shorted to activate relay J12: PT02A8-4S</p>
Front Panel Indicators:	<p>On/Off switch</p> <p>Source power LED indicator</p> <p>Digital meter, switch selectable between voltage and current</p>
Size:	<p>1.75" x 19.0" x 13.0" (4.5 x 48.3 x 33.0 cm)</p>
Weight:	<p>10 lbs (4.5 Kg)</p>
Operating Temperature:	<p>0 to 50°C</p>
Storage Temperature:	<p>–20 to 55°C</p>
Mating connectors:	<p>Complete set included</p>

*Specifications subject to change without notice  
January 2026, HW Rev. ≥ 2.00*

For more information on this and other products, contact:

Distributed by: